


3M DBR/Y-6 vs DRYCONN DBR/Y-600 COMPARISON

DRYCONN®
WATERPROOF CONNECTORS
DBR/Y-600

WHY CHOOSE DRYCONN?

- DBR/Y-600 has 74% more silicone, with 14.75ml versus the competitors mere 8.5ml
- The larger amount of dielectric silicone sealant holds the Gorilla Nut in place without needing a locking mechanism
- Our Gorilla Nut has a wider wire range (Min #22/ Max #8) and is constructed of thermoplastic material which makes it easier on your hands and more reliable over time

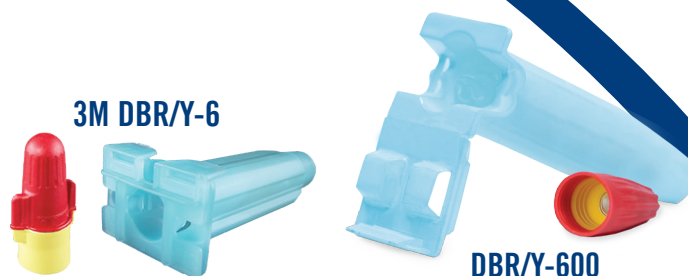

	3M DBR/Y-6	DRYCONN DBR/Y-600
OPERATING TEMPERATURE RATING	-40° to 221°F	-40° to 221°F
WIRE RANGE	Min #18/Max #10	Min #22/Max #8
HANDLES SOLID AND STRANDED WIRE	Yes	Yes
TYPE OF SEALANT	Silicone	Silicone
SEALANT VOLUME	8.5 mL	14.75 mL (74% more!)
DIRECT BURY LISTED	Yes	Yes
MAX VOLTAGE	600V	600V
LOW VOLTAGE APPLICATIONS	Yes	Yes
FORCE REQUIRED TO MOVE CONNECTOR	15.5 lbs	17 lbs
STRAIN RELIEF LID	Yes	Yes
IMPACT RESISTANT TUBE CONSTRUCTION	Yes	Yes
TWO-PIECE DESIGN	Yes	Yes
SPLICING CONNECTOR	3M R/Y+	Gorilla Nut Cushion Grip Connector
UV RESISTANT TUBE CONSTRUCTION	Yes	Yes
LANDSCAPE LIGHTING APPLICATIONS	Yes	Yes
OUTDOOR WATERPROOF APPLICATIONS	Yes	Yes
TWO WIRE DECODER SYSTEMS	Yes	Yes
UL486D LISTED	Yes	Yes
WATERPROOF & CORROSION PROOF	Yes	Yes
COUNTRY OF MANUFACTURE	USA	Made in USA of US and Foreign Parts